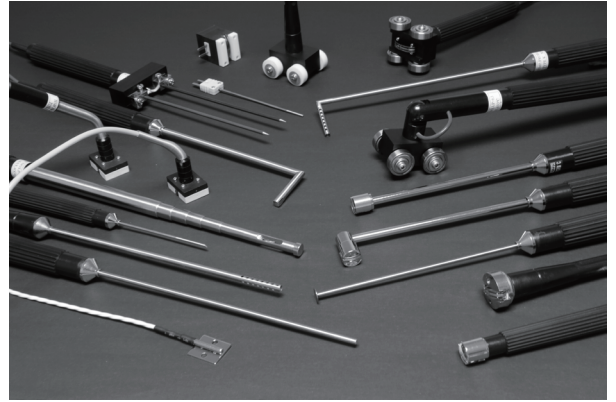

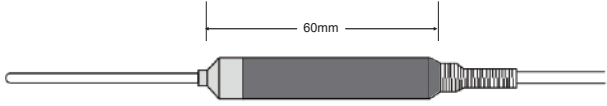

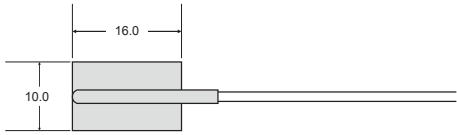

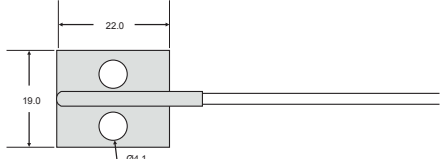

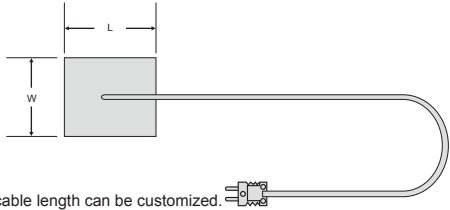
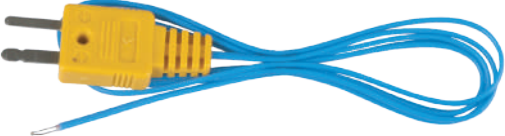
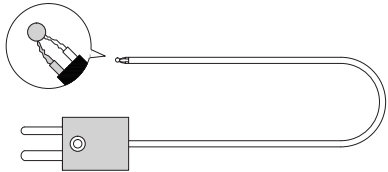



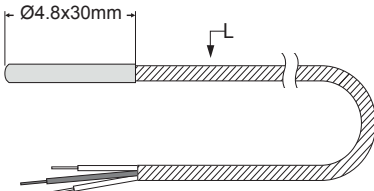

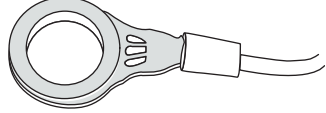

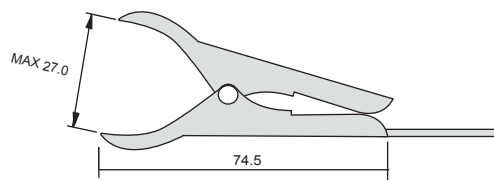

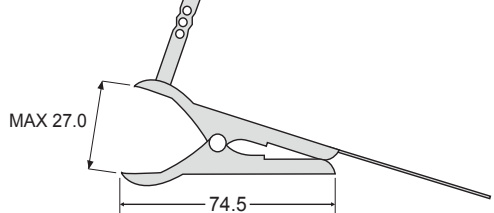







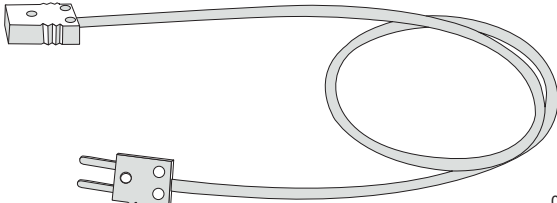
Temperature Probes LP series-1



Extra Heavy Duty Design
Integral High Impact Thermoplastic Handle.
Available in All Thermocouples and RTD
Calibrations
All Probes are Provided with a Miniature
Quick Connector

GENERAL TYPE

<p>GP-01</p> 	 <p style="text-align: right;">Ø2.8 x 60mm -20~250°C</p>
<p>GP-02 Surface attached type</p> 	 <p style="text-align: right;">t=1.0 -40~250°C</p> <p>※The extension cable and sensor type can be customized.</p>
<p>GP-02-PS Surface attached with screw mounting</p> 	 <p style="text-align: right;">t=1.5 -40~250°C MAX 260°C</p> <p>※The extension cable and sensor type can be customized.</p>
<p>GP-02-AF</p> 	 <p style="text-align: right;">t=0.05 -40~260°C</p> <p>※The W, L and cable length can be customized.</p>
<p>GP-03</p> 	 <p style="text-align: right;">-50~250°C</p> <p>※ The cable length and Temperature ranges can be specified.</p>

<p>GP-03M</p> 	 <p>Ø4.8x30mm</p> <p>※The extension cable and sensor type can be customized.</p>
<p>GP-04 Sensor ring size specifiable</p> 	<p>Ø15xØ10.5</p>  <p>※Specifications can be customized.</p> <p>-20~200°C</p>
<p>GP-05 Clip type</p> 	 <p>MAX 27.0</p> <p>74.5</p> <p>-20~250°C</p>
<p>GP-05-LS</p> 	 <p>MAX 27.0</p> <p>74.5</p> <p>-20~250°C</p>
<p>GP-06 Screw type</p> 	 <p>※Specifications can be customized.</p> <p>-40~220°C</p>
<p>GP-07 Screw type (Deep)</p> 	 <p>※Specifications can be customized.</p> <p>-50~+400°C</p>
<p>GP-08 Screw type (Light)</p> 	 <p>※Specifications can be customized.</p> <p>-50~+250°C</p>
<p>GP-11 Extension Cable (Length specifiable)</p> 	 <p>0~+65°C</p> <p>※The cable length and Temperature ranges can be specified.</p>